SENSORFLOW WAVE

A6163AA

SILVER 2023 ecovadis

SENSORFLOW WAVE | Basin mixer 81.5x161x138 mm, 116 mm spout projection in chrome finish, 3.8 l/min (3 bar), no waste | EasyFix, Cool Body technology, Touchless control, SmartShine

Image & drawing





General information

Product type:	Washbasin mixers
Sub product type:	Basin mixer
Brand:	Armitage Shanks
Suite name:	SENSORFLOW WAVE
Designer:	Ideal Standard
Colour:	AA - Chrome
Surface finish effect:	glossy
Height (mm):	138
Width (mm):	81.5
Length / Projection (mm):	161
Fixing method:	EasyFix
Net weight (kg):	2.06
EAN code:	4015413332989

Minimum operating pressure 1 bar. Fitted with a proximity sensor which will automatically shut off 2 seconds after sensor no longer detects movement. Automatic flow stop factory set to operate after 55 seconds of continuous operation. Adjustable duty flush/purge facility. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device, please see A5900AA (for use with 15mm pipework) or A5901AA (for use with 22mm pipework. Mains powered Sensorflow products must be connected to a continuous permanent power supply of these require 220-240 volts and each 1 having its own fuse spur.

Features



Downloads

Installation Guide


Spare Parts List

Product standard & certifications

Additional standards: WRAS certificate name: EN 248 | DIN 4109-1 | EN 15091 1707015

Product specifications

Amount of handles:	1
Blue Start technology:	No
Colour code:	AA
Colour description:	chrome
Cool Body technology:	Yes
Easy Fix technology:	Yes
Handle application:	Temperature control
Handle position:	Lateral
Includes a chain eye:	No

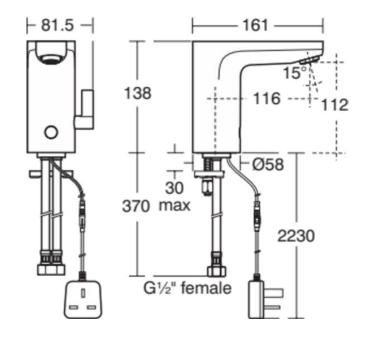

SENSORFLOW WAVE

SENSORFLOW WAVE | Basin mixer 81.5x161x138 mm, 116 mm spout projection in chrome finish, 3.8 l/min (3 bar), no waste | EasyFix, Cool Body technology, Touchless control, SmartShine

Product specifications

Troduct specifications	
Integrated electronics:	Yes
Lead-free waterways:	Yes
Low-pressure model:	No
Material:	Metal
Material of handle:	Metal
Material quality:	Brass
Max. flow rate at 3 bar (l):	3.8
Max. flow rate at 3 bar (l) for all outlets:	3.8
Max. flow rate at 3 bar (l) for spout:	3.8
Max. operating pressure (bar):	8
Min. operating pressure (bar):	1
Nickel-free waterways:	Yes
Operating method:	Contactless
PVD technology:	No
SmartShine:	Yes
Spout model:	Fixed
Surface cover:	chromium-plated
Surface finish effect:	glossy
Tap outlet model:	Aerator
Tap outlet visibility:	Visible
Tap outlet adjustable:	No
Tap outlet is anti-vandal:	No
Touchless control:	Yes
Type of handle:	Rotary knob
Type of temperature control:	Manually operated
With drain plug:	No
With escutcheon(s):	No
With handle(s):	Yes
With outlet:	Yes
With pull-out spray:	No
With waste set:	No
Fixing method:	EasyFix
Mounting method:	Tap hole



A6163AA





Your local contact:

België • Belgique

Ideal Standard Produktions GmbH Ikaroslaan 18 B-1930 Zaventem ① +32 2 325 66 00 ⊒ +32 2 325 66 01 www.idealstandard.be

България

Идеал Стандарт - Видима АД ул. "Марин Попов" 53 гр. Севлиево, 5400 Ф +359 885 938 880 office@idealstandard.com www.idealstandard.bg

Česká republika

Hrvatska

Ideal Standard Hrvatska Lopatinečka ul. 8 10000, Zagreb ① +385 91 229 9304 www.idealstandard.hr

Danmark

Ideal Standard Skandinavia ApS Fynsvej 9 5500 Middelfart (Denmark) ① +45 75 84 10 10 www.idealstandard.dk

Deutschland

Ideal Standard GmbH Euskirchener Straße 80 53121 Bonn ① +49 (0)228 521-0 ⊒ +49 (0)228 521-241 ⊠ idealstandard.de@idealstandard.com www.idealstandard.de

Éire

Ideal Standard Éire 2nd Floor, Unit 3103 Lake Drive Citywest Business Campus Tallaght Dublin 24 YXW2 (1) +353 1 4564525 www.idealstandard.ie

España

Ideal Standard Iberia S.L.U Riera Principal Nr. 8 08328 Alella (Barcelona - España) (1) +34 93 561 80 00 www.idealstandard.es

Ελλάδα

Ideal Standard S. Α. Γραφεία Αθηνών: Λ. Μεσογείων 265, 15451 Ν. Ψυχικό, Αθήνα Φ +2106790800 www.idealstandard.gr

France

Ideal Standard France - Siège social 39Rue St. Sabin 75011 Paris (2) +33 (0)1 49 38 81 34

- 0 +35 (0)1 49 58 81 54
- sav.idealstandard@idealstandard.com
 (demandes techniques) /
 devis.chantier@idealstandard.com
 (demandes commerciales)
 www.idealstandard.fr

Italia

Ideal Standard (Italia) Srl Via Giosuè Borsi 9 20143 Milano, Italia → +39 (0)2 28881
 info@idealstandard.it
 www.idealstandard.it

Nederland

Österreich

Ideal Standard GmbH Zweigniederlassung Österreich Erzherzog-Karl-Str. 131–135 1220 Wien Österreich ③ +43 125 66 222-0 ⊒ +43 125 66 222-625 www.idealstandard.at

Polska

Ideal Standard Polska UI, Ostrowskiego 7 53-238 Wroclaw ① +48 71 78 68 301 www.idealstandard.po

România

Srbija

Ideal Standard - Vidima AD Drinčićeva br.19, I sprat, stan br.8 11000 Beograd Srbija © +381 11 7138 058 www.idealstandard.rs

United Kingdom